
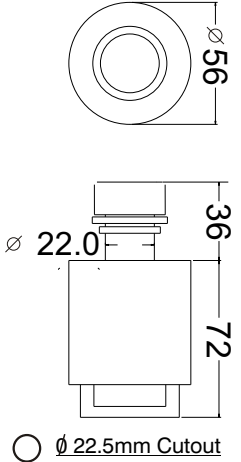

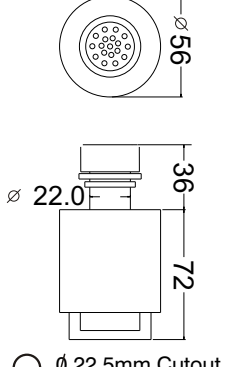




MIMIC 'm' Series Buzzer, Ringer, Hooter

MIMIC	Dimension	Salient features	Code	
	 <p>∅ 22.5mm Cutout</p>	<ul style="list-style-type: none"> • Available voltages: 6,12,24,48,110, 240, 415 VAC 6,12,24,48,110, 220 VDC • Piezo sound • 22.5 mm cutout 	MIMIC 22.5 mm 'm' Series Buzzer	
			MB	Buzzer
			MB+F	Buzzer + 'Economy' series Flasher
			MB+F/STD	Buzzer + 'Standard' series Flasher
			MB+F/LEG	Buzzer + 'Legend' series Flasher
			MB+F/ECO	Buzzer + 'Economy' series Steady + Flasher
			MB+F/STD	Buzzer + 'Standard' series Steady + Flasher
			MB+F/LEG	Buzzer + 'Legend' series Steady + Flasher
			S+BCFL	'Bicolour' Steady + Buzzer cum Flasher
				For 110 VDC, 220 VDC & 415 VAC Extra with separates external resistor.
	 <p>∅ 22.5mm Cutout</p>	<ul style="list-style-type: none"> • Available voltages: 6,12,24,48,110, 240, 415 VAC 6,12,24,48,110, 220 VDC • Speaker sound • 22.5 mm cutout 	MIMIC 22.5 mm 'm' Series Hooter	
			MH	Hooter
			MHCF/ECO	Hooter cum 'Economy' series Flasher
			MHCF/STD	Hooter cum 'Standard' series Flasher
			MHCF/LEG	Hooter cum 'Legend' series Flasher
	For 110 VDC, 220 VDC & 415 VAC with separate external resistor.			
	 <p>∅ 22.5mm Cutout</p>	<ul style="list-style-type: none"> • Available voltages: 6,12,24,48,110, 240, 415 VAC 6,12,24,48,110, 220 VDC • Speaker sound • 22.5 mm cutout 	MIMIC 22.5 mm 'm' Series Ringer	
			MR	Ringer
				For 110 VDC, 220 VDC & 415 VAC with separate external resistor.