
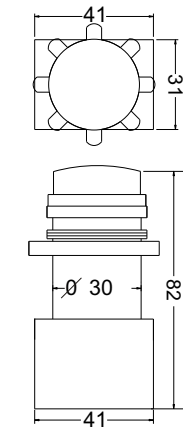


# MIMIC 30.5 Cutout square body *Economy* lamp

## MIMIC



○ Ø 30.5mm Cutout

**Available voltage:**  
 6,12,24,48,110,240,415 VAC  
 6,12,24,48,110,220 VDC  
 6,12,24,48,110,220 VAC/DC

Rugged design

Proven performance

0.5 Watt

**Also available Green steady Red Flasher or vice versa or any combination with any two colour.**

Adjustable time 0 to 180 sec.

Indicates actual legend like R, Y, B, ON, OFF, TRIP, PUMP ON etc.

**Code**

|               |  |
|---------------|--|
| L/ECO 30      | Red, Green, Amber  |
| L/ECO 30      | White, Blue  |
| BIL/ECO 30    | <b>Bicolour lamp</b> Red, Green, Amber                   |
| TRL/ECO 30    | <b>Tricolour lamp</b> Red, Green, Amber                  |
| FL/ECO 30     | <b>Flasher lamp</b> Red, Green, Amber                    |
| RL/ECO 30     | <b>Relay lamp</b> with single change over contact        |
| RL/ECO 30     | <b>Relay lamp</b> with double change over contact        |
| ← S+FL/ECO 30 | <b>Steady + Flasher lamp</b> Red, Green, Amber           |
| TL/ECO 30     | <b>Timer lamp</b> with single change over contact        |
| ← TL/ECO 30   | <b>Timer lamp</b> with double change over contact        |
| OCL/ECO 30    | <b>Open collector lamp</b> with single output transistor |
| OCL/ECO 30    | <b>Open collector lamp</b> with double output transistor |
| BL/ECO 30     | <b>Buzzer cum Flasher lamp</b> Red, Green, Amber         |

**TRUTH TABLE FOR "AND LAMP"**

| ← LOL/ECO 30 |           |            |            | <b>Logic 'AND' lamp</b> with single change over contact |   |
|--------------|-----------|------------|------------|---|---|
| INPUT - 1    | INPUT - 2 | INDICATION | RELAY      | LOL/ECO 30  | <b>Logic 'AND' lamp</b> with double change over contact |
| ✓            | ✗         | ✗          | Denergised |   |   |
| ✗            | ✓         | ✗          | Denergised |   |   |
| ✓            | ✓         | ✓          | Energised  |   |   |

**TRUTH TABLE FOR "OR LAMP"**

| ← LOL/ECO 30 |           |            |           | <b>Logic 'OR' lamp</b> with single change over contact |  |
|--------------|-----------|------------|-----------|--|--|
| INPUT - 1    | INPUT - 2 | INDICATION | RELAY     | LOL/ECO 30   | <b>Logic 'OR' lamp</b> with double change over contact |
| ✓            | ✗         | ✓          | Energised |  |  |
| ✗            | ✓         | ✓          | Energised |  |  |
| ✓            | ✓         | ✓          | Energised |  |  |

For 110 VDC, 220 VDC

For 415 VAC

Lamp with fire retardant body